


CODE: **AWO229** v1.2/IV
 NAME: **Enclosure 17/EXP/SAT/GRADE 3**

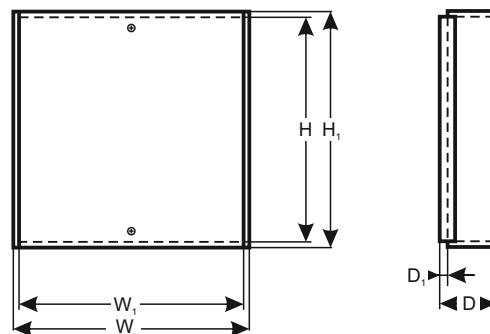

APPLICATION

1. Modules:

SATEL: INT-E, INT-PP, ACCO-NT, ACCO-KP, ACCO-KPWG, ACCO-KP-PS, ACCO-KPWG-PS.

2. Buffer power supply units:

SATEL: APS-412, APS-612.

PULSAR: PSB251215, PSB351225, PSB501235, PSB751250.

TECHNICAL PARAMETERS

| | |
|--|--|
| External dimensions of the enclosure: | W=330, H=305, D=120 D ₁ =15 [+/- 2mm] |
| External dimensions of the front panel: | W ₁ =325, H ₁ =310 [+/- 2mm] |
| Weight net/gross: | 3,15kg / 3,40kg [+/-0,1kg] |
| Battery space: | 17 Ah/12 V Sealed Lead Acid (SLA) |
| Operating environment: | 2nd environmental class, -10°C÷ 40°C |
| Material description: | sheet steel DC01, thickness: 1,0mm, corrosion protection, color: RAL 9003 |
| Destination: | indoor |
| Tamper protection: | enclosure is equipped with set including mounting bracket with tamper |
| Closing: | screwed x 2 |
| Notes: | distance from wall (mounting surface) - 15mm, "C"-shaped doors and the bottom of the casing, no hinges |
| Declaration, warranty: | RoHS, in accordance with the EN50131 standard, Grade 3 2 year from the production date |