

VIR-MCP040

MULTI CHANNEL CONTROLLER

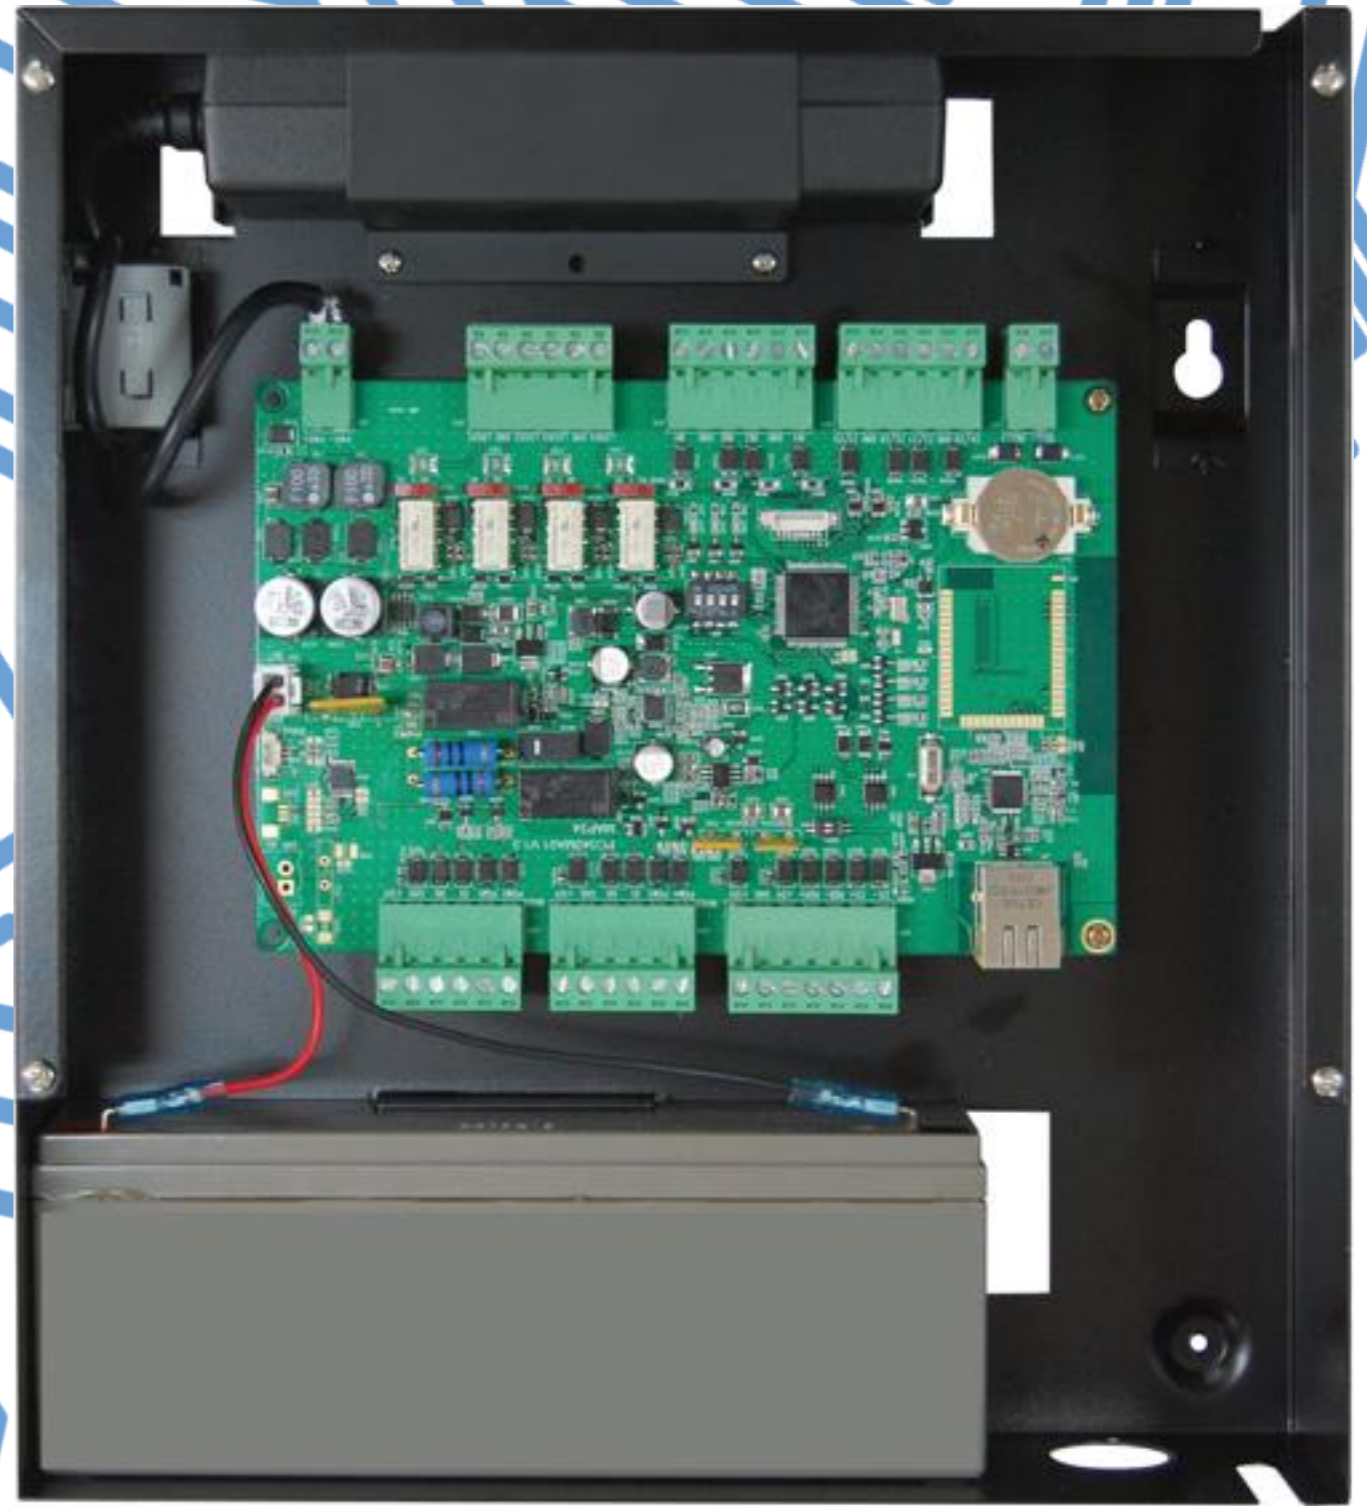




TABLE OF CONTENTS






VIRDI INTEGRATED

ACCESS TIME & ATTENDANCE **VIRDI**

VIRDI

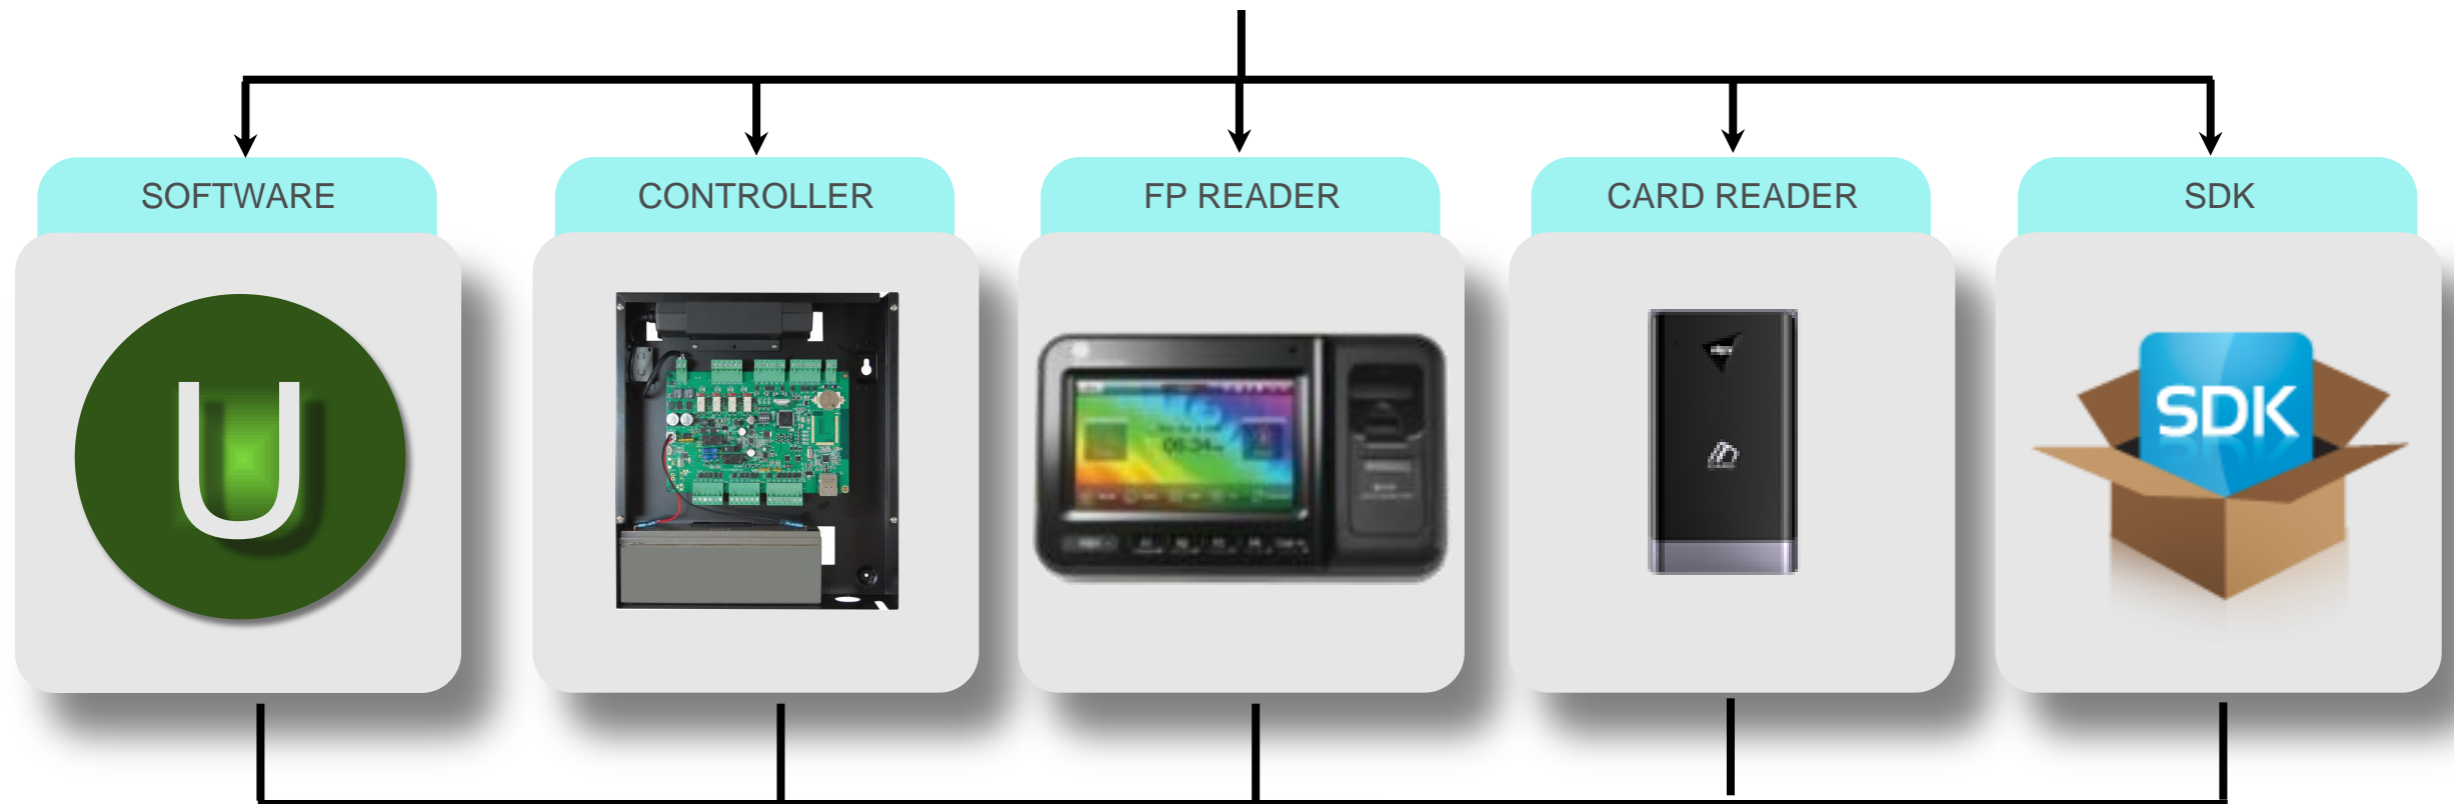

All-in-One Solution




RAS
SAFETY | SECURITY | SERVICE





CONNECTION & UPS

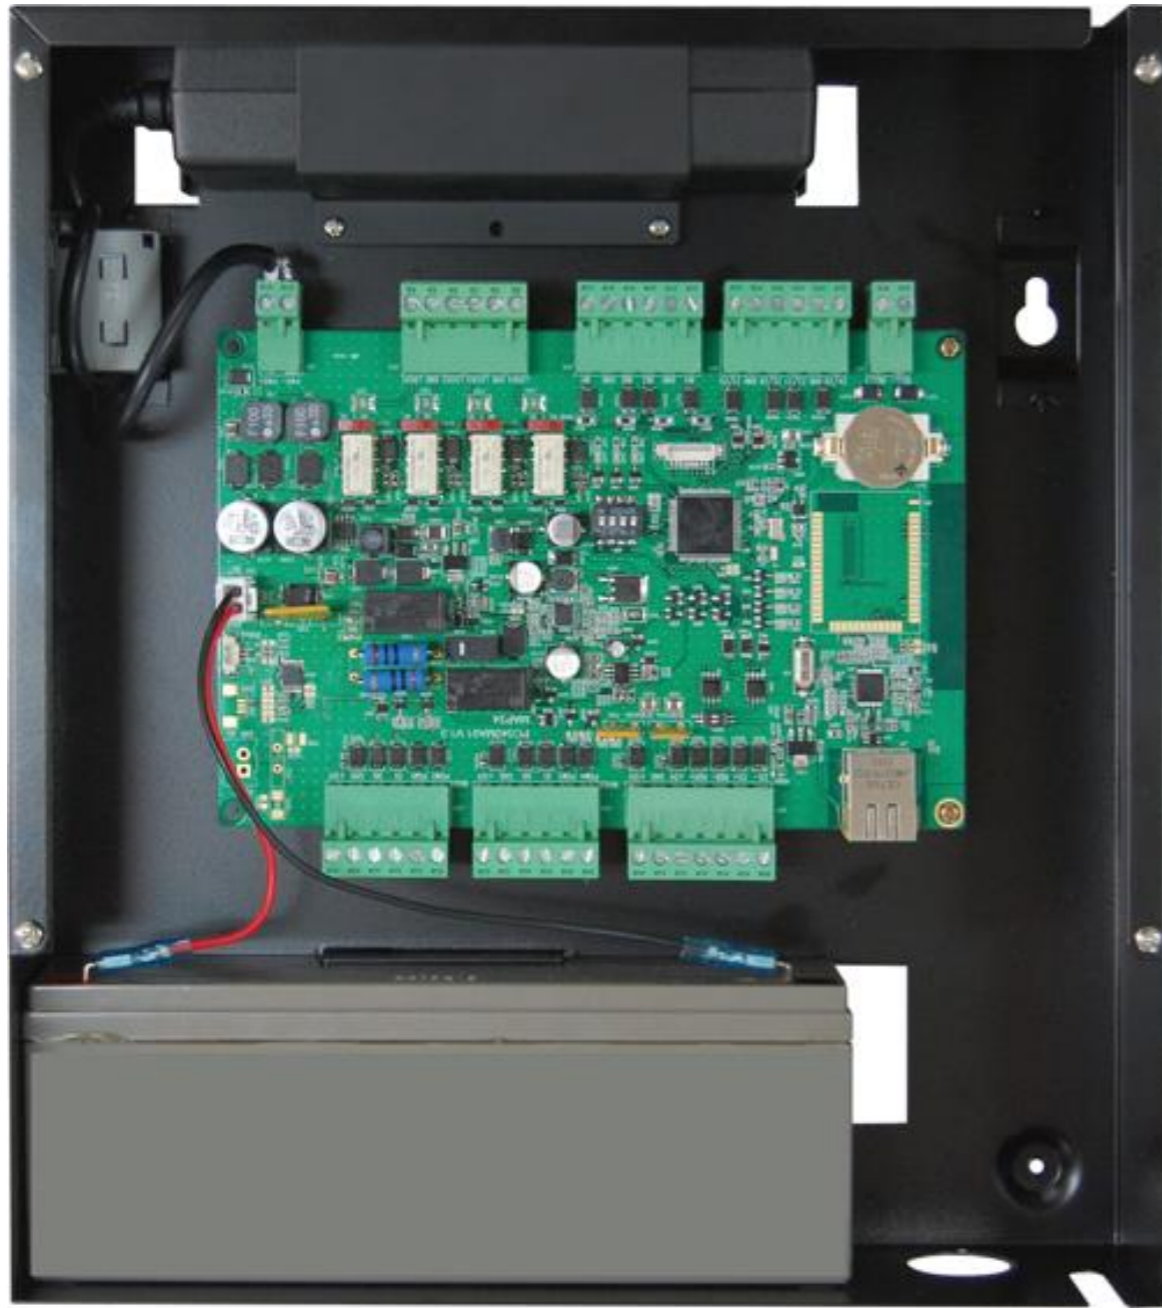

RS485

X




RS485


X



10 READERS

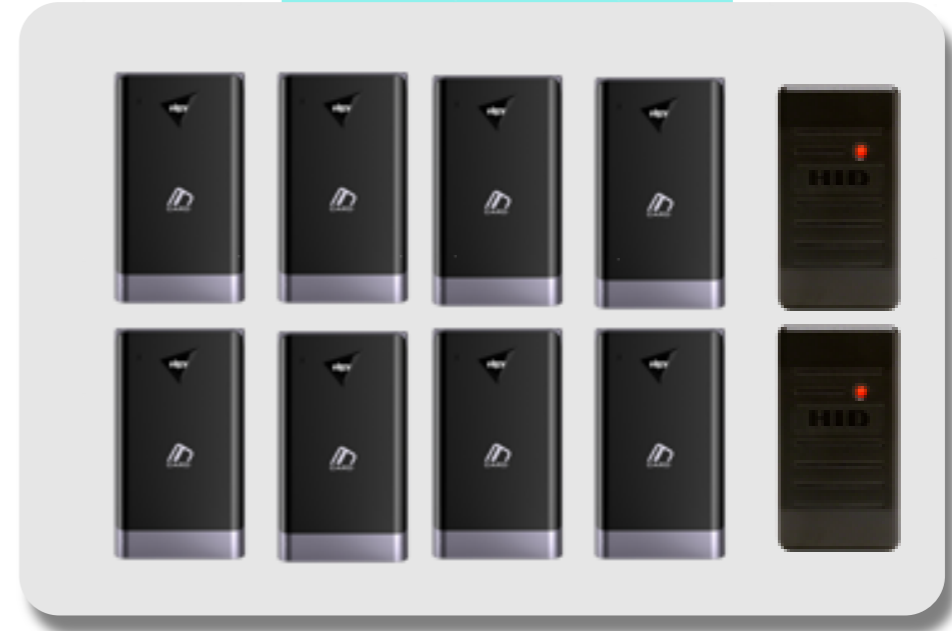

4 LOCKS

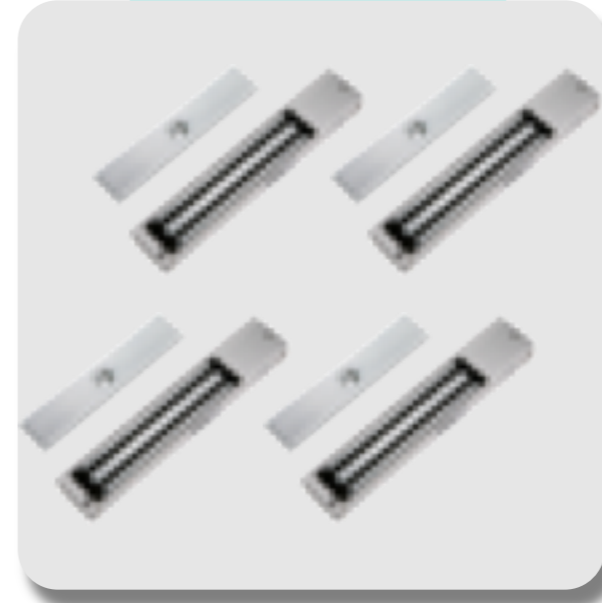



SPECIFICATIONS

GENERAL FEATURE

50,000 User (Card Only)
51,200 Log Events
1,024 Access Group
4 PGM Inputs/Outputs, Hardware Zone inputs max. 8
Back-up Battery Support
Scheduled Outputs
Monitored Bell/Siren Output

SPECIFICATION

CPU	32Bit M3 Cortex
MEMORY	128K SRAM
	8MByte Serial Flash
Communication Port	2 RS485: 8 External Virdi Readers (2 Reader / Door) 4 Wiegand port (4 x IN), RS232 1 port (Debug)
	1 TCP/IP Ethernet Port for Server (UNIS 3.0 Application)
Temp./Humidity	-20 ~ 60 C / Lower than 90% RH
Power Adapter	12VDC 6.67A
Power Supply	12VDC Maximum 6A +- 10%
Lock Output (4)	12VDC Maximum 750ma ea.
PGM (4)	12VDC outputs Maximum 50ma ea.

